# SIGNODE®

# TTX

## Semi Automatic Plastic Strapping Machine
## Economical, Open Cabinet, Bottom Seal Model

# FEATURES AND BENEFITS

- **DURABLE**
  The TTX features a welded steel frame. Stainless steel top plate with package guide to assure straight straps.

- **RELIABLE**
  PC Board controlled, 110VAC motor, electric solenoids, and sensor controlled heater blade.

- **SAFE**
  Electrical safety interlocks on the hinged top plate. All power to machine is removed when top cover is opened.

- **SPECIFICATIONS**

**Power Supply:** 120 Volts, Single Phase.

**Strap Tension:** From 10 to 99 lbs.

**Strap Width:** 1/4", 3/8", or 1/2" Polypropylene on 8" X 8", or 9" X 8" ID core sizes.

**Strap Type:** Signode Empax with a 8" X 8", or 9" X 8" ID core.

**Package Sizes:** Minimum - 3-1/2" W X 2" H
Maximum - Unlimited

**Machine Dimensions:** 34" L X 22" W X 30-1/4" H

**Machine Weight:** 185 lbs.

Distributor:

# STANDARD FEATURES

The TTX machine uses a simplified strapping head. Feed, retract, and tension are all cam operated.

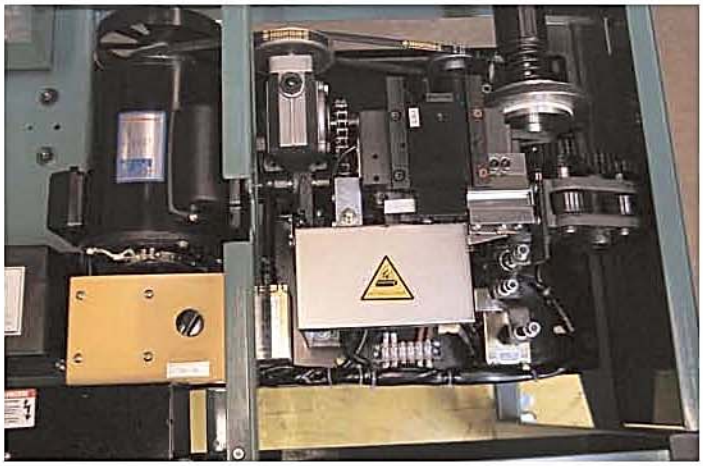

External tension control and setting indicator are on the outside of the machine.

SIGNODE®

©2003 Signode Distributor Sales An ITW Company Printed in the U.S.A PM/SDS-TTX Rev 12/03